

## RT54HC



A new generation of ecological heat storage materials utilising the processes of phase change between solid and liquid (melting and congealing) to store and release large quantities of thermal energy at nearly constant temperature. The RUBITHERM® phase change materials (PCM's) provide a very effective means for storing heat and cold, even when limited volumes and low operating temperature differences are applicable.

We look forward to discussing your particular questions, needs and interests with you.

### Properties RT-line:

- stable performance throughout the phase change cycles
- high thermal storage capacity
- limited supercooling
- non toxic
- melting temperature range between -9 °C and 100 °C available

### The most important data:

**Melting area**

Typical Values  
**53-54** [°C]

main peak: 54

**Congeeing area**

**54-53** [°C]

main peak: 54

**Heat storage capacity ± 7,5%**

Combination of latent and sensible heat in a temperatur range of 46°C to 61°C.

**200** [kJ/kg]\*

**56** [Wh/kg]\*

**Specific heat capacity**

**2** [kJ/kg·K]

**Density solid**

at 25°C

**0,85** [kg/l]

**Density liquid**

at 60°C

**0,8** [kg/l]

**Heat conductivity**

**0,2** [W/(m·K)]


**max. operation temperatur**

**85** [°C]

**Corrosion**

**slight corrosive effect on metals**

Beispiel / example: RT54HC Teilenthalpie / Partial enthalpy distribution

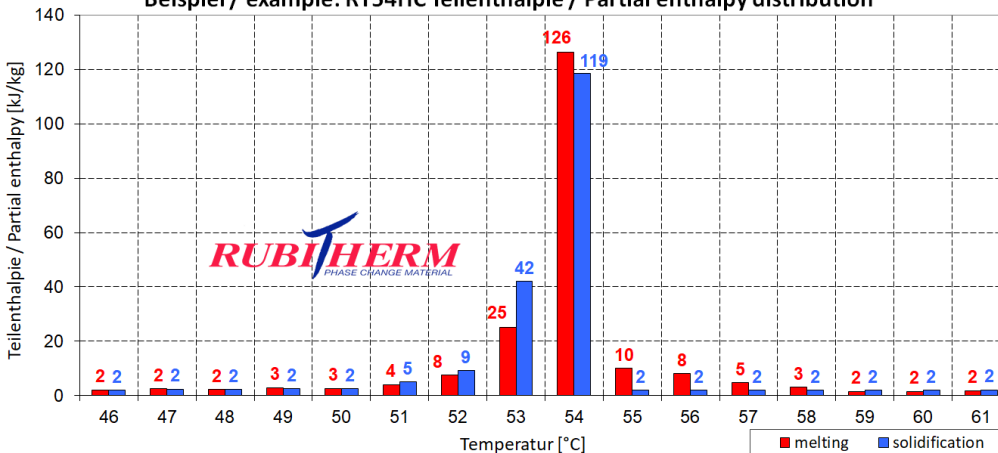

\*measured with 3-layer-calorimeter

Rubitherm Technologies GmbH  
Imhoffweg 6  
D-12307 Berlin  
Tel: +49 (30) 7109622-0  
E-Mail: info@rubitherm.com  
Internet: www.rubitherm.com

The product information given is a non-binding planning aid, subject to technical changes without notice. Version:

09.10.2020