

SP-7

The creation of the latent heat material RUBITHERM® SP has led to a new and innovative class of low flammability PCM.

RUBITHERM® SP consists of a unique composition of inorganic components. RUBITHERM® SP is preferably used as macroencapsulated material.

With melting points below 0°C these materials are ideal for temperature controlled transport of frozen goods.

We look forward to discussing your particular questions, needs and interests with you.

Properties:

- stable performance throughout the phase change cycles
- high thermal storage capacity per volume
- limited supercooling (2-3K dependig on volume and cooling rate),
- low flammability, non toxic
- different melting temperatures between -50°C und 70°C are available
- encapsulation necessary, minimum volume: 50ml



The most important data:

Melting area

Congealing area

Heat storage capacity ± 7,5%

Combination of sensible and latent heat in a temperatur range of -10 °C to 5 °C.

Specific heat capacity

Density solid

at -15°C

Density liquid

at 20 °C

Heat conductivity

Max. operation temperature

Corrosion

Notes:

Typical Values:

-7 bis -5 [°C]

main peak:-6

-6 bis -8 [°C]

main peak:-6

290 [kJ/kg]

80 [Wh/kg]*

2 [kJ/kg·K]*

~1,25 [kg/l]

~1,15 [kg/l]

0,6 [W/(m·K)]

30 [°C]


corrosive effect on metals

-15°C recommended for freezing



Many SP-product are hygroscopic and may absorb moisture if stored improperly. This can result in a change of the physical properties given. Storing in closed containers mandatory.

Beispiel / example: SP-7_2 Teilenthalpie / Partial enthalpy distribution*

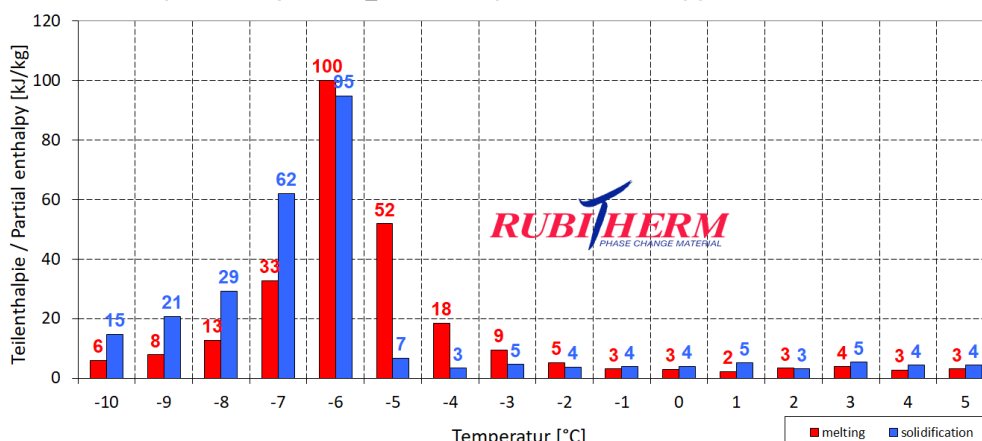

*Measured with 3-layer-calorimeter.

Rubitherm Technologies GmbH
 Imhoffweg 6
 D-12307 Berlin
 phone: +49 (30) 7109622-0
 E-Mail: info@rubitherm.com
 Web: www.rubitherm.com

The product information given is a non-binding planning aid, subject to technical changes without notice. Version: 12.07.2022