

## RT18HC

RUBITHERM® RT is a pure PCM, this heat storage material utilising the processes of phase change between solid and liquid (melting and congealing) to store and release large quantities of thermal energy at nearly constant temperature. The RUBITHERM® phase change materials (PCM's) provide a very effective means for storing heat and cold, even when limited volumes and low differences in operating temperature are applicable.

We look forward to discussing your particular questions, needs and interests with you.

Properties:

- high thermal energy storage capacity
- heat storage and release take place at relatively constant temperatures
- no supercooling effect, chemically inert
- long life product, with stable performance through the phase change cycles
- melting temperature range between -4 °C and 100 °C




### The most important data:

	Typical Values	
<b>Melting area</b>	<b>17-19</b>	<b>[°C]</b>
	main peak: 18	
<b>Congeeing area</b>	<b>19-17</b>	<b>[°C]</b>
	main peak: 17	
<b>Heat storage capacity ± 7,5%</b>	<b>260</b>	<b>[kJ/kg]*</b>
Combination of latent and sensible heat in a temperatur range of 11°C to 26°C.	<b>72</b>	<b>[Wh/kg]*</b>
<b>Specific heat capacity</b>	<b>2</b>	<b>[kJ/kg·K]</b>
<b>Density solid</b> at 15 °C	<b>0,88</b>	<b>[kg/l]</b>
<b>Density liquid</b> at 25 °C	<b>0,77</b>	<b>[kg/l]</b>
<b>Heat conductivity (both phases)</b>	<b>0,2</b>	<b>[W/(m·K)]</b>
<b>Volume expansion</b>	<b>12,5</b>	<b>[%]</b>
<b>Flash point</b>	<b>135</b>	<b>[°C]</b>
<b>Max. operation temperature</b>	<b>50</b>	<b>[°C]</b>



Beispiel: RT18HC Teilenthalpie / Partial enthalpy distribution

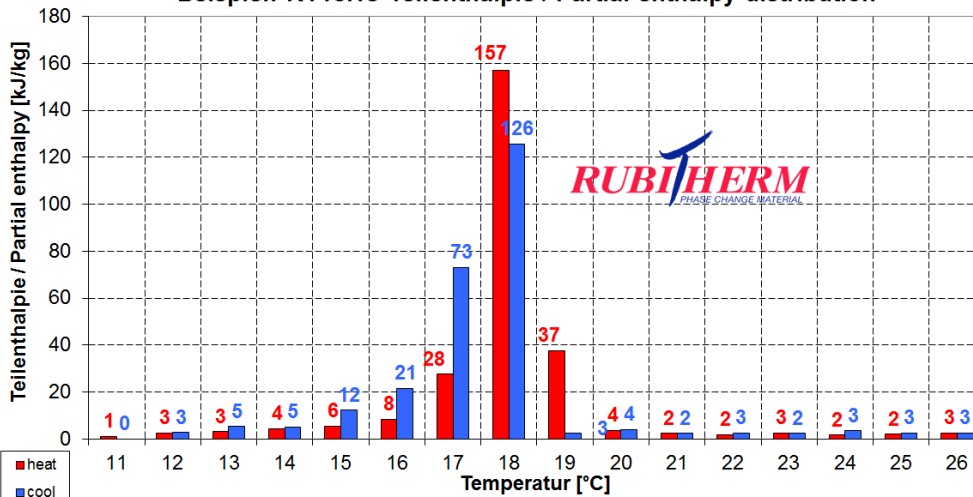

\*Measured with 3-layer-calorimeter.

Rubitherm Technologies GmbH  
Sperenberger Str. 5a  
D-12277 Berlin  
Tel: +49 30 720004-62  
Fax: +49 30 720004-99  
E-Mail: info@rubitherm.com  
Internet: www.rubitherm.com

The product information given is a non-binding planning aid, subject to technical changes without notice. Version:

31.05.2016